


WT-9A

Digital Thermometer

- ✔ **Big Display**
- ✔ **Auto shut-off**
- ✔ **High sampling frequency**



WT-9A Digital Thermometer

Characteristics


High accuracy, low power consumption, large LCD display, high sensitivity, smart design, etc. It is perfect for milk, coffee, BBQ, especially bath water temperature.

Technical Parameters

Measurement range: $-50^{\circ}\text{C} \sim 300^{\circ}\text{C}$ / $-58^{\circ}\text{F} \sim 572^{\circ}\text{F}$
Accuracy: $\pm 1^{\circ}\text{C}$ ($-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$ / $-4^{\circ}\text{F} \sim 158^{\circ}\text{F}$)
Resolution: 0.1°C / 0.1°F
Sampling frequency: 0.5S
Battery: LR44 1.5V

Operation

- ◆ Rotate the battery cover to the position as showing, take it down and install the battery.

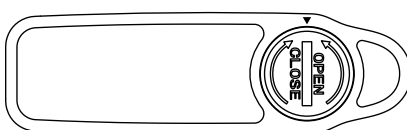

- ◆ Turn on: Press ON/OFF
- ◆ Switch Units: Press C/F
- ◆ Hold temperature: "hold" the temperature reading until pressed again
- ◆ Auto-off: 8 minutes Auto-off

